



Furuno FA-40/70 AIS Class B Automatic Identification System



More Information


 0821 9900 2018  Pernika.com

KEY FEATURES:


- Silent Mode with optional ON/OFF switch
- Compact and light with wider range and faster transmit performance*
- Internal VHF splitter eliminates need for separate antenna*
- Switchable SO-TDMA and CS-TDMA*
- NMEA2000 port, 2x NMEA0183 ports and a USB (micro B) port
- Initial setup can be done through the NMEA2000 network (TZT2/TZT3)

*FA-70 ONLY

The Automatic Identification System (AIS) improves the safety level of boating by exchanging information about the status of your ship with other AIS-equipped craft nearby.

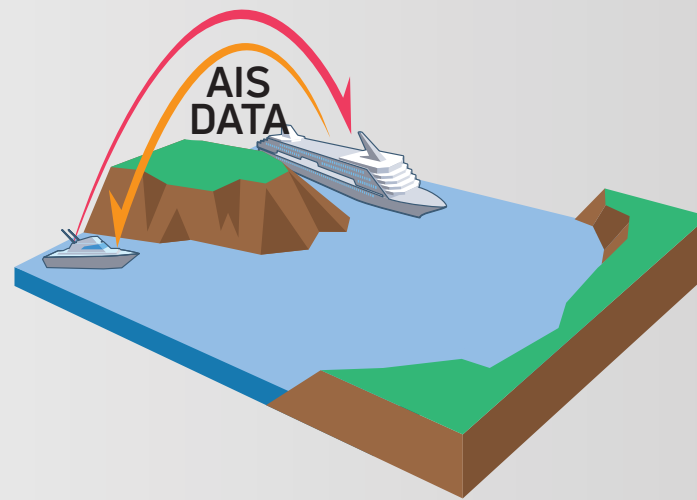

Simply tap on an AIS target to reveal critical information: Ship's name, COG, SOG, CPA, TCPA, Range and Bearing.

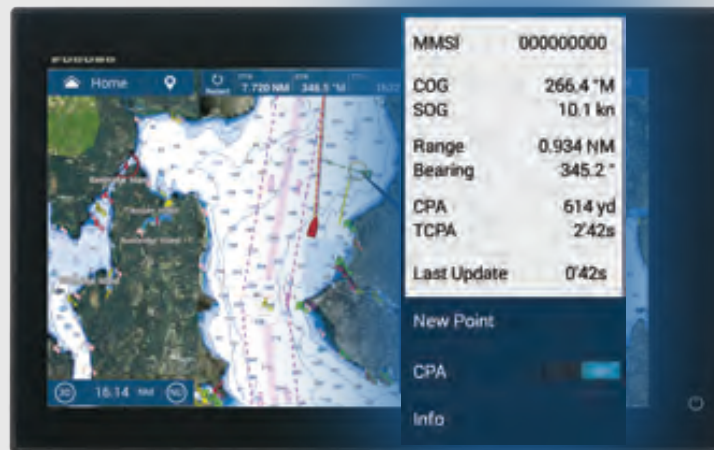

AIS targets are fully visible and predictable when interfacing with a compatible Furuno Radar.




The FA-40/70 AIS receives the vessel name, call sign, position, COG, SOG, and other useful information from surrounding vessels.

The FA-70 is a Class-B+ AIS that transmits your vessel information at higher power & faster rates than typical Class B units for added awareness. SO-TDMA guarantees an AIS time slot allocation, making you visible in congested waters.

SUPERBLY ACCURATE INFORMATION EXCHANGE AND SIMPLE SETUP WITH NMEA2000/NMEA0183


MODEL	DYNAMIC DATA	STATIC DATA	VOYAGE RELATED DATA
FA-40 INFORMATION TO BE RECEIVED	- Ship's position - Coordinated Universal Time (UTC) - Course Over Ground (COG) - Speed Over Ground (SOG) - Rate Of Turn (ROT) - Heading - Navigation status	- MMSI (Maritime Mobile Service Identity) - IMO number - Ship's name - Ship's type - Call sign - Length and beam - Location of position-fixing antenna on ship	- Ship's draft - Hazardous cargo - Destination and ETA
FA-70 INFORMATION TO BE RECEIVED AND TRANSMITTED	- Ship's position - Coordinated Universal Time (UTC) - Course Over Ground (COG) - Speed Over Ground (SOG) - Rate of Turn (ROT)* - Heading *If transmitted by remote AIS	- MMSI (Maritime Mobile Service Identity) - IMO number - Ship's name - Ship's type - Cargo - Call sign - Length and beam - Location of position-fixing antenna on ship	

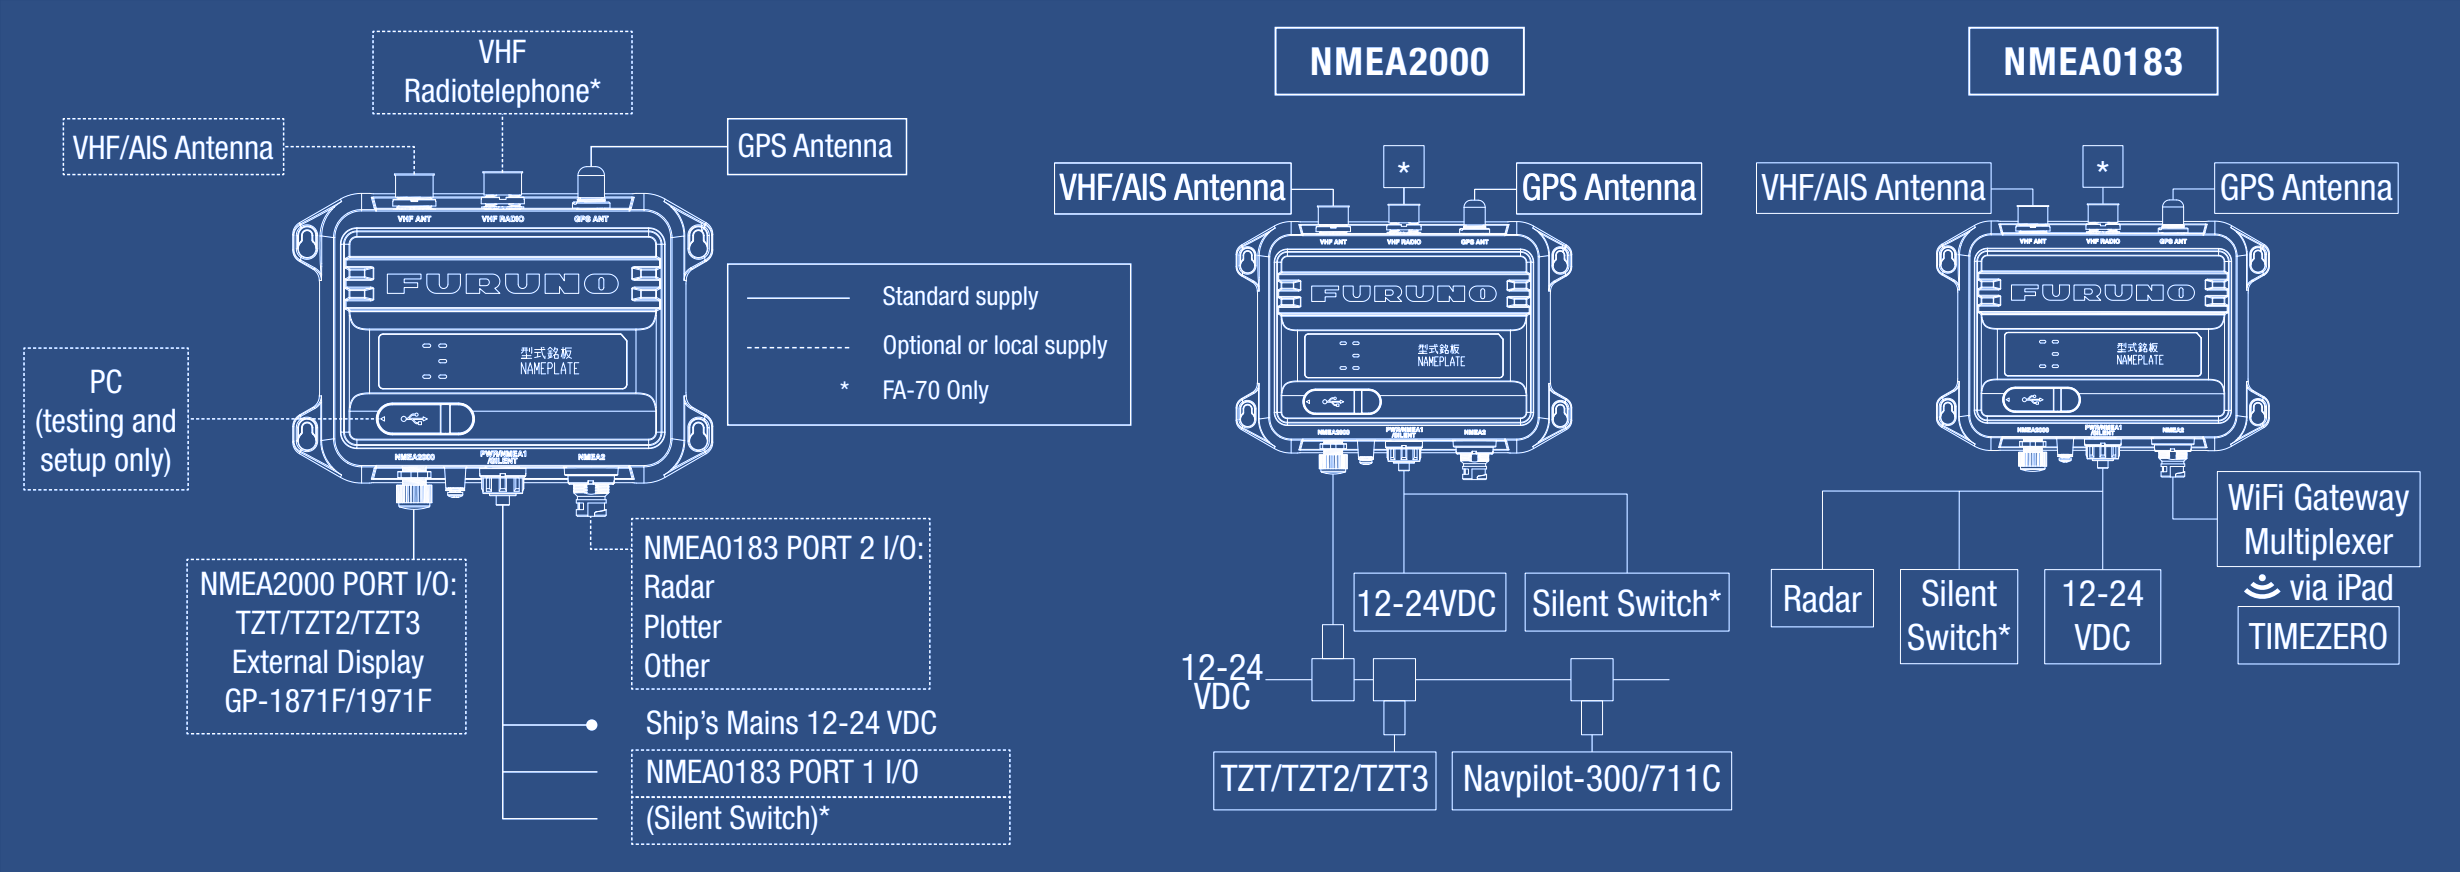


Specification

MODEL		AIS RECEIVER		CLASS-B+ AIS TRANSCEIVER	
		FA-40		FA-70	
STANDARDS					
		EN 303 413 V1.1.1, EN 301 843-1 V2.2.1 IEC 60945 Ed.4+CORR.1 IMO MSC.140 (76) ITU-R M.1371-5 IEC 62368-1 Ed.3			
				DSC: ITU-R M.825-3 IEC 62287-1 Ed.3.0, IEC 62287-2 Ed.2.0, IEC 62311 Ed.1+Ed.2	
TRANSPONDER UNIT					
TX/RX Frequency (FA-40/70: RX Frequency)					
Output Power		FA-40 Receive Only		Selectable: 5W or 1W (SO-TDMA), 2W (CS-TDMA)	
Channel Spacing		25 kHz			
GPS RECEIVER					
Receiving Channels		12 channels, SBAS 2 channels, 14 satellites tracking			
Rx Frequency		1575.42 MHz			
Rx Code		C/A code			
Position Accuracy		13 m (2 drms, HDOP <= 4)			
INTERFACE					
NMEA0183	Input - 2 Ports	ACA, ACK, AIQ, DTM, GBS, GGA, GLL, GNS, HDT, OSD, RMC, SSD, THS, VBW, VSD, VTG		ABM*, ACK, AIQ, BBM*, HDT, SSD, THS, VSD *(ABM, BBM: SO-TDMA only)	
	Output - 2 Ports	ABK, ACA, ACS, ALR, GGA, GLL, RMC, SSD, TXT, VDM, VDO, VER, VSD, VTG			
NMEA2000	Input - 1 Port	059392, 059904, 060160, 060416, 060928, 065240, 126208, 127250			
	Output - 1 Port	059392, 059904, 060928, 126208, 126464, 126992, 126993, 126996, 126998, 127258, 129025, 129026,129029, 129038, 129039, 129040, 129041, 129540, 129792, 129793, 129794, 129795 ¹ , 129796, 129797, 129798, 129800 ² , 129801, 129802, 129803, 129804 ¹ , 129805, 129806, 129807, 129809, 129810, 129811, 129812 ¹ , 129813 ³ ¹ (FA-40/FA-70: SO-TDMA mode only) ² (FA-40: SO-TDMA mode only), ³ (FA-70: SO-TMDA mode only)			
ENVIRONMENT					
Temperature	Antenna Unit	-25°C to +70°C			
	Other Units	-15°C to +55°C		-15°C to +55°C	
Waterproofing	Antenna Unit	IP56			
	Other Units	IP55			
POWER SUPPLY					
Transponder Unit (FA-40: Receiver Unit)		12-24 VDC, 0.3-0.2 A		12-24 VDC, 1.8-0.9 A	
UNIT DIAGRAMS					

FA-40 AIS Receiver Unit
0.45 kg (1.0 lbs)

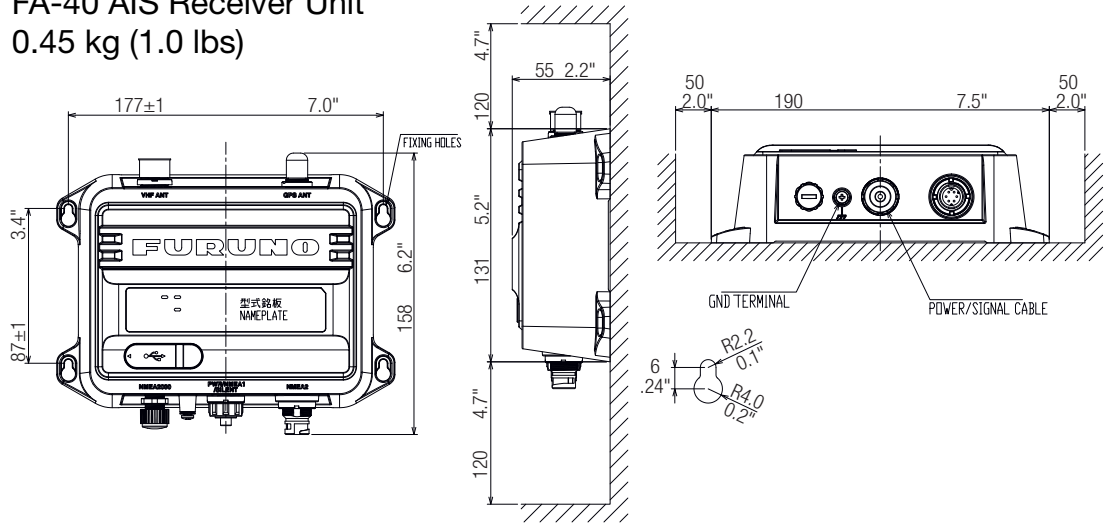

FA-70 Transceiver Unit
0.52 kg (1.1 lbs)

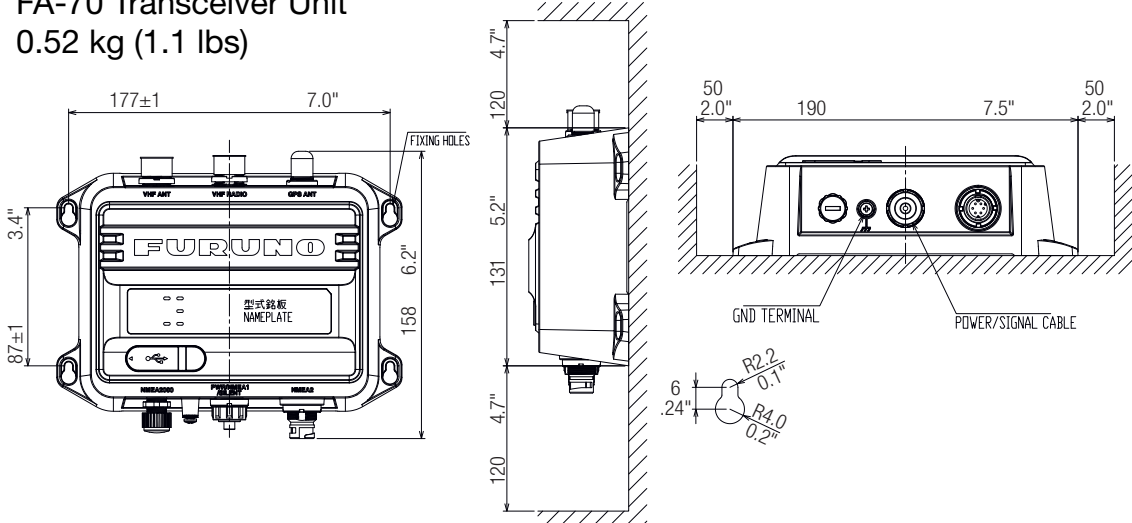

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Catalog No. CA000001657
B-2210LB