

More Information

The all-new Thuraya MarineStar blends robust design with unprecedented functionality and unmatched levels of value to provide communications Thuraya MarineStar is competitively priced. Users have the flexibility to select from a wide range of plans and bundles tailored their choice, which could be stand-alone voice, stand-alone tracking and monitoring - with or without an application, or a comb are no long-term contracts, no hidden fees and no early termination fees. with tracking and monitoring over Thuraya's satellite network, covering the world's busiest sea routes and fishin

More power to users

- Quick and easy to install
- Circuit-switched voice
- Fish catch reporting capability
- Advanced 2-way vessel tracking with application and monitoring
- OTA (over-the-air) programming capability
- Versatile interface functions
- Geofencing capability
- Radio silence capability
- SOS alert
- Push notifications for weather, news and other alerts
- Languages: English, Chinese, Vietnamese, French, Arabic, Bahasa, Tagalog, Turkish
- Tracking application as a service

Catch reporting, Tracking and Crew welfare

Delivering the reassurance of constant connectivity and communications, Thuraya MarineStar caters to the operational requiremen regional operator fishing vessels. * Built to IEC 60945 standards, this flexible affordable solution synergizes helping users comply with the ever-evolving international regulations.

- Catch reporting, tracking and monitoring capabilities help meet regulatory requirements
- Constant voice connectivity ensures safety and welfare of fishermen
- Crew are always within easy reach even on high seas
- Geofencing guarantees safety and security of vessels
- SOS and crew calling

Unaffected by extreme maritime environments, Thuraya MarineStar satisfies the operational requirements of larger vessels too. It provides access to competitively priced calls, supporting crucial maritime applications such as navigation and emergency alerts through push notifications.

Thuraya MarineStar also appeals to regional merchant fleets needing a backup alternative to Radio communications and GSM for voice.

The reach of Thuraya's maritime network is enormous: according to data from the Western & Central Pacific Fisheries Commission (WCPFC), 80% of the world's fishing regions lies within Thuraya's footprint.

More functionality for system integrators


Thuraya MarineStar enables users to perform condition based, on-board monitoring for maintenance activities according to equipment's status. This results in better planning and upkeep that is much more efficient. Moreever, The MarineStar has multiple ibuilt interfaces to integrate third-party hardware, which greatly enhance its capabilities and, thereby appeal.

- Physical interfaces RS-232 and GPIO accommodate third-party integrators
- Delivers cost-efficient maintenance by reducing out-of-service time
- Conducive to remote diagnostics: sensor inforation is transmitted for equipment monitoring

Service advantage for Mobile Network Operators (MNOs)

With more than 395 roaming agreements in 161 countries, Thuraya is the only L-band operator to open up business opportunities for MNOs. The MarineStar is backed by local numbering plan and GSM roaming over the Thuraya satellite network. As a result, users continue to stay connected on GSM numbers even outside terrestrial coverage. .

- Use local MNO SIM cards on local numbering plan
- Enables inexpensive communication over satellite
- Provides customized packages as per national requirements

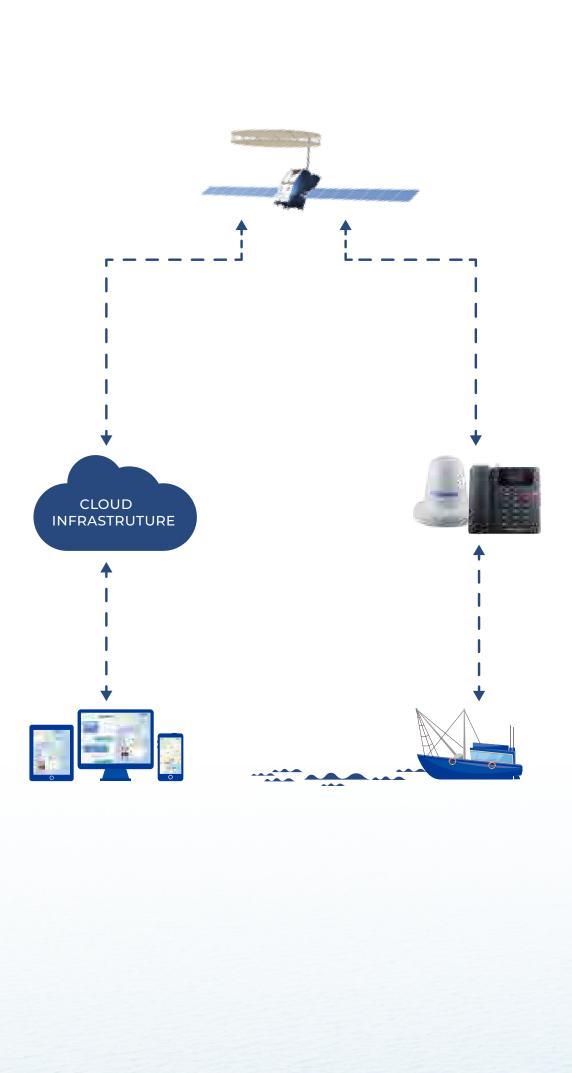

Technical specifications

Service

Circuit-switched voice

SMS

GmPRS (externally via serial interface)

Physical characteristics

Weight (ADU) 1.30 kg
Weight (BDU) 1.07 kg

Size (ADU) 185mm x 177mm

Size (BDU) 203mm x 190mm x 72.7mm

Connectors DC input, GPIO port (2in + 2out);

RS-232 serial port, NMEA port,
RJ-11 port for analog extenstion, 3.5mm

audio output, Sim slot

User interface 2.4 inch display, SOS button, Key

pad, Navigation pad, and low or high external

power input LED indicator

External connector SAT and GPS RF cable connections

to ADU

Operating Temperature (ADU) -25°C to +55°C
Operating Temperature (BDU) -15°C to +55°C
Storage Temperature (ADU) -40°C to +80°C
Storage Temperature (BDU) -20°C to +70°C

Ingress protection (ADU) IP 67
Ingress protection (BDU) IP 32

Operating Humidity 5 to 95% RH at 40°C

External power

Main power input 10.8-31.5VDC

Maximum current 3.6A for 12VDC and 1.8A for 24VDC

Others

Languages* English, Arabic, Chinese,

Vietnamese, French, Turkish,

Bahasa, Tagalog

Add-on application** Thuraya SatTrack

PT Cipta Pernika Nusantara

Jl. Tebet Dalam IIIC No. 16C, Jaksel (021) 2283 5024

Pernika.com